

# DRAIN COCK

Accessories

System 01

## Technical Data Sheet



## Description

- Drain cock - Male 1/4
- Sealing ensured by an O-ring

- Captive drain plug



## DRAIN COCK

Accessories - System 01

| DN  |    | PFA<br>in bar | PS in bar |    |    |    | Cat. | Ref.              | Designation               | Weight<br>Kg |
|-----|----|---------------|-----------|----|----|----|------|-------------------|---------------------------|--------------|
| "   | mm |               | L1        | L2 | G1 | G2 |      |                   |                           |              |
| 1/8 | 10 | 10            | 10        | 10 | 10 | 10 | 4.3  | <b>149F021246</b> | Drain cock with handwheel | 0,020        |
| 1/4 | 10 | 10            | 10        | 10 | 10 | 10 | 4.3  | <b>149F008273</b> | Drain cock                | 0,020        |
| 1/8 | 10 | 10            | 10        | 10 | 10 | 10 | 4.3  | <b>149F022153</b> | Cylindrical drain cock    | 0,020        |
| 1/4 | 10 | 10            | 10        | 10 | 10 | 10 | 4.3  | <b>149F037170</b> | Cylindrical drain cock    | 0,020        |

### Important notice :


The indicated pressure for the different categories of fluids (L1/L2/G1/G2) is under no condition a guarantee of use. Therefore, it is essential to validate the use of products under given operating conditions.

### Technical features

|   |                 |
|---|-----------------|
| Operating temperature                           | -10 °C at 80 °C |
| Permissible operating pressure (PFA) in water   | See table above |
| Maximum permissible pressure (PS) other mediums | See table above |
| Connection                                      | BSP thread      |
| Mediums   | Clear liquids   |

### Nomenclature and materials

| N° | Description  | Materials | EURO       | ANSI       |
|----|--------------|-----------|------------|------------|
| 1  | O-ring       | EPDM      | EPDM 80ShA |            |
| 2  | Milled wheel | Brass     | CuZn39Pb2  | ASTM B 124 |
| 3  | Rivet        | Brass     | CuZn39Pb2  | ASTM B 124 |
| 4  | Body         | Brass     | CuZn39Pb2  | ASTM B 124 |




## Approvals

### International construction Standards :

Thread connection according to NF E 03-005 ISO 228

## Sizing

| DN A |    | B  | C   | D  |
|------|----|----|-----|----|
| "    | mm | mm | mm  | mm |
| 1/8  | 6  | 28 | 7,5 | 12 |
| 1/4  | 8  | 25 | 8,5 | 14 |

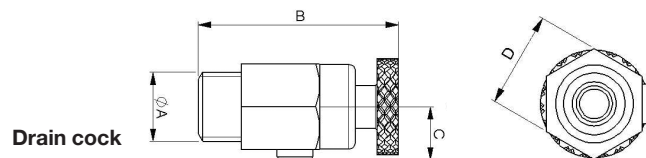

The descriptions and photographs contained in this product specification sheet are supplied by way of information only and are not binding.

Socla reserves the right to carry out any technical and design improvements to its products without prior notice. Warranty : All sales and contracts for sale are expressly conditioned on the buyer's assent to Socla terms and conditions found on its website at [www.socla.com](http://www.socla.com). Socla hereby objects to any term, different from or additional to Socla terms, contained in any buyer communication in any form, unless agreed to in a writing signed by an officer of Socla.



A WATTS Brand

Socla sas

365 rue du Lieutenant Putier • 71530 Virey-Le-Grand • France

Tel. +33 03 85 97 42 00 • Fax +33 03 85 97 42 42

contact@wattswater.com • [www.socla.com](http://www.socla.com)

ISO 9001 version 2015 / ISO 18001